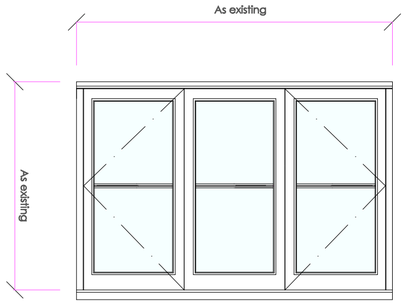

EXTERNAL



GLAZING BAR DETAIL

W1



INTERNAL



VERTICAL SECTION

Head to be 70mm x 50mm
Top rail to be 45mm x 35mm
Glazing bar to be 18mm x 35mm
Bottom rail to be 70mm x 35mm

Window constructed of preservative treated hardwood
To be two pane flush casement window with no central mullion
To include draught seals and slimline double glazed units
with through glass window bars, lockable lever handle in
brass and decorated to match existing. Timber to be Sapele

Slim Sightline 7mm - 4mm Planilux / 6mm Krypton / 4mm Planitherm
(total 14mm unit)
U-value = 1.55W/m2k



HORIZONTAL SECTION



EXTERNAL



GLAZING BAR DETAIL

W2



INTERNAL



VERTICAL SECTION

Head to be 70mm x 50mm
Top rail to be 45mm x 35mm
Glazing bar to be 18mm x 35mm
Bottom rail to be 70mm x 35mm

Window constructed of preservative treated hardwood
To be two pane flush casement window with no central mullion
To include draught seals and slimline double glazed units
with through glass window bars, lockable lever handle in
brass and decorated to match existing. Timber to be Sapele

Slim Sightline 7mm - 4mm Planilux / 6mm Krypton / 4mm Planitherm
(total 14mm unit)
U-value = 1.55W/m2k



HORIZONTAL SECTION



EXTERNAL



GLAZING BAR DETAIL

W3



INTERNAL



VERTICAL SECTION

Head to be 70mm x 50mm
Top rail to be 45mm x 35mm
Glazing bar to be 18mm x 35mm
Bottom rail to be 70mm x 35mm

Window constructed of preservative treated hardwood
To be two pane flush casement window with no central mullion
To include draught seals and slimline double glazed units
with through glass window bars, lockable lever handle in
brass and decorated to match existing. Timber to be Sapele

Slim Sightline 7mm - 4mm Planilux / 6mm Krypton / 4mm Planitherm
(total 14mm unit)
U-value = 1.55W/m2k



HORIZONTAL SECTION



ELEVATION

W4



ELEVATION

VERTICAL SECTION

Head to be 70mm x 50mm
Top rail to be 45mm x 35mm
Glazing bar to be 18mm x 35mm
Bottom rail to be 70mm x 35mm

Window constructed of preservative treated hardwood
To be two pane flush casement window with no central mullion
To include draught seals and slimline double glazed units
with through glass window bars, lockable lever handle in
brass and decorated to match existing. Timber to be Sapele

Slim Sightline 7mm - 4mm Planilux / 6mm Krypton / 4mm Planitherm
(total 14mm unit)
U-value = 1.55W/m2k



HORIZONTAL SECTION

CAMPBELL McCRAE Limited

architectural services

Chapel House, 5 The Stiles, Godmanchester, Huntingdon, Cambridgeshire, PE29 2JF
Tel: 01480 433074 Web: www.campbell-mccrae.co.uk
Registered number: 7830594. Registered in England and Wales. Registered address: 88 High St, Ramsey, Cambs, PE26 1BS

Project:	Drawing title:	Scale	Date	Drwg No.	Revision
Primrose Cottage, Church Lane Leighton Bromswold	Joinery details	1:20@A2	Apr 25	22448_07	

Use figured dimensions only, do not scale.
Campbell McCrae Ltd can accept no responsibility for the interpretation of this drawing when the practice is not named as contract administrator in the building contract.