COR VISION SLIDING SYSTEM TBB

ENERGY EFFICIENCY

Thermal Transmission Coefficient
Uw ≥ 1.3 (W/m²K)
Please consult typology, dimensions and glazing

ACCOUSTIC INSULATION

Maximum glazing: **30 mm**
Maximum accoustic insulation: **Rw = 41 dB**

CATEGORIES ACHIEVED AT TEST CENTRE

Protection against atmospheric agents

Air permeability (EN 12207):	**Class 4**
Water tightness (EN 12208):	**Class 7A**
Wind resistance (EN 12210):	**Class C5**
Security Test: PAS24 ☑	**Passed**

Reference test: Balcony 1.23 x 1.55 m, 1 sash + 1 fixed

SECTIONS	Frame 116 mm Tri-rails 182 mm Sash 37 mm
PROFILE THICKNESS	Door 1.7 mm
MAXIMUM DIMENSIONS	Width (L) = 2.500 mm Height (H) = 3.000 mm
MAXIMUM WEIGHT/SASH	320 Kg

Please consult regarding maximum weight and dimensions according to types

DRAINAGE	Optionally drainage system and drainage grid made of stainless steel

EXTRUSION ALLOY

6063 T-5

POLYAMIDE STRIP LENGTH

Polyamide 6.6 reinforced with 25% fiberglass from 16 to 24 mm

OPENING POSSIBILITIES

Sliding
Possibility of 1, 2 or 3 rails
Possibility of interior and exterior corner at 90º without mullion
Galandage

FINISHES

Colour powder coating
(RAL, mottled, rough...)
According to Qualicoat >60 micras

Wood effect powder coating
According to Qualideco standard

Anodized
According to Ewwa Euras
Standard Class 15
Optionally Class 20 and 25

Optionally bicoloured

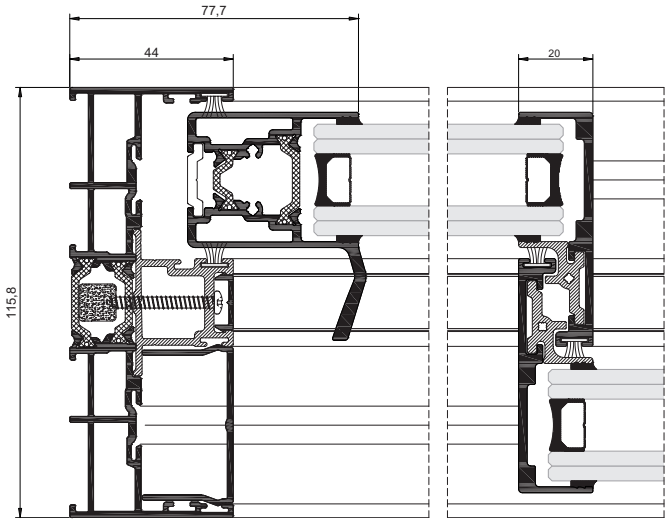

NBS Source PARTNER