Ingleton Wood LLP shall have no liability to the Employer arising out of any unathorised modification or amendment to, or any transmission, copy or use of the material, or any proprietary work contained therein, by the Employer, Other Project Team Member, or any other third party.

All dimensions are to be checked and verified on-site by the Main Contractor prior to commencement; any discrepancies are to be reported to the Contract Administrator.

This drawing is to be read in conjunction with all other relevant drawings and specifications.

Do Not Scale

© Ingleton Wood LLP



Window Type A - 3no;
- W0-01, W0-02, W0-03

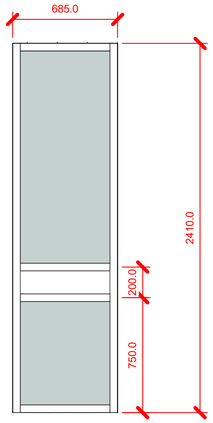

Window Type B - 7no;
- W0-04, W0-05, W0-06, W0-07
- W0-08, W0-09, W0-10

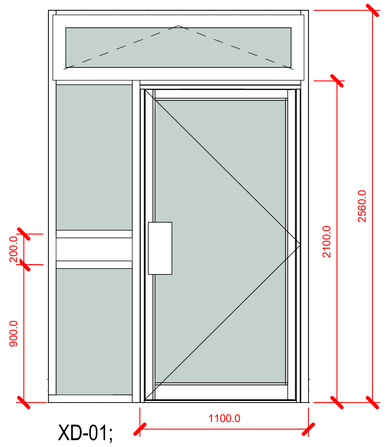

XD-01;
- teleflex to fan light
- access control
- single action escape
- ironmongery SET1

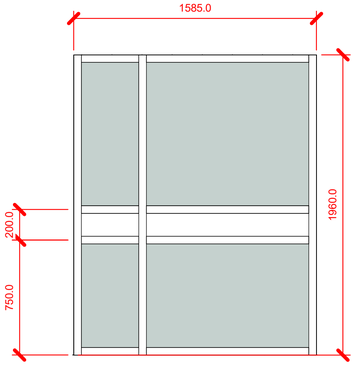

Window Type C - 1no.
- W0-11

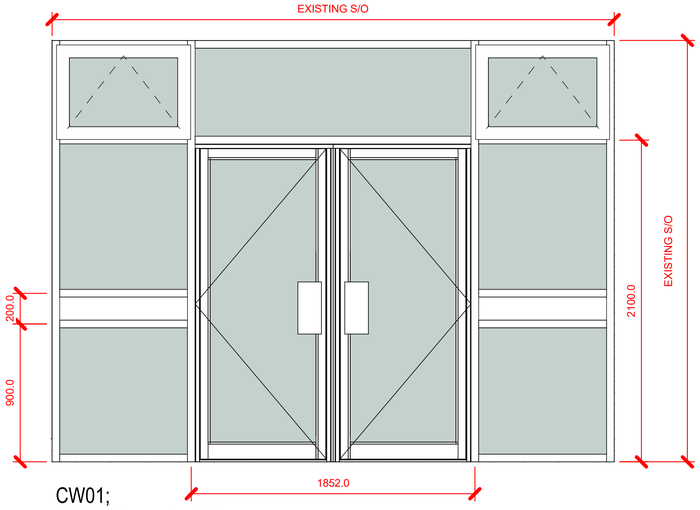

CW01;
- teleflex to fan lights
- access control
- single action escape
- ironmongery SET 2

TO NOTE:

- Window/ doors/ curtain walling to be PPC aluminium finished in RAL 7011
- All openable windows to have a 100mm restrictors.
- All curtain walling, windows and doors to achieve a minimum U-value of 1.4W/m²K.
- All coloured insulated louvred panels are to achieve the same U-value and be finished as noted above.
- All windows to have manually operable trickle vents
- All window units to be double glazed, with both inner and outer panes to be 6mm toughened glass.
- Toughened Safety Glass conforming to BS 6206: 1981 to be used in all glass to doors and adjacent sidelights lower than 1500mm above floor level, and all glass lower than 800mm above floor level elsewhere.
- For Fire signage refer to Fire Plans

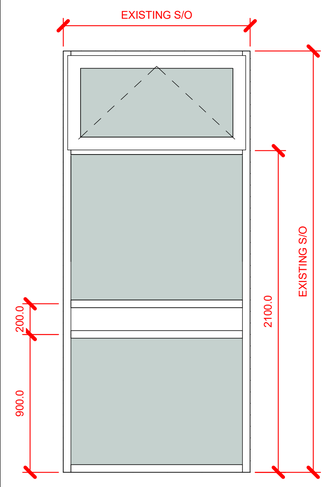

Window Type D - 1no.
- W0-12
- teleflex operation

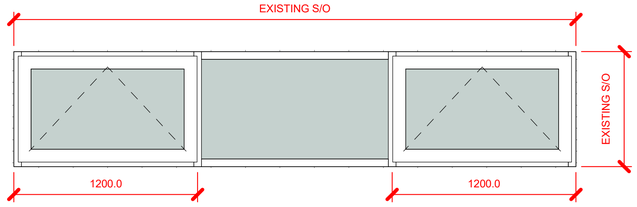

Window Type E - 1no.
- W0-13
- teleflex operation
- opaque glazing

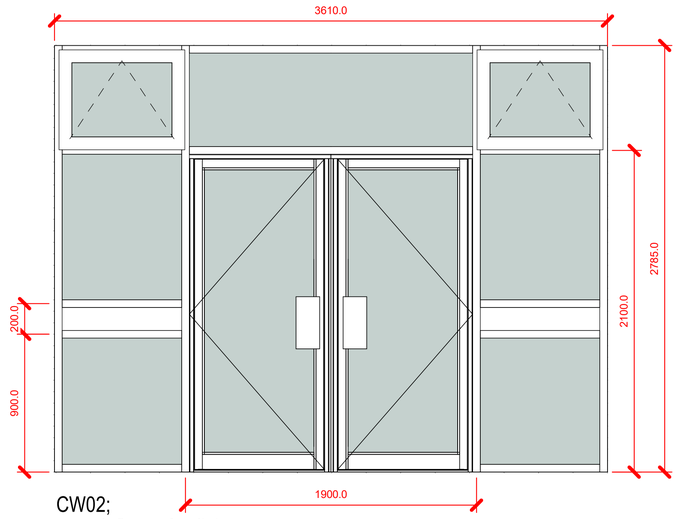

CW02;
- teleflex to fan lights
- access control
- single action escape
- ironmongery SET 2

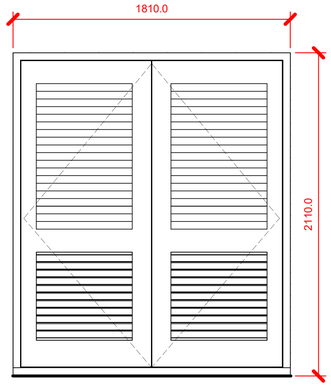

XD-02; Plantroom door
- louvred door with insect mesh
- access control
- ironmongery SET 2

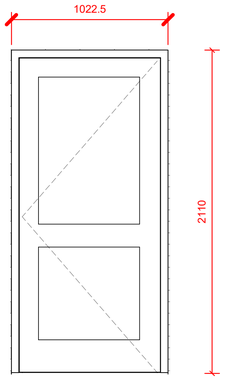

- XD-03; Drying room door
- single action escape
- solid insulated panels
- 50mm sill profile
- access control
- ironmongery SET 3



Window Type F - 1no.
- W0-14;
- opaque glazing

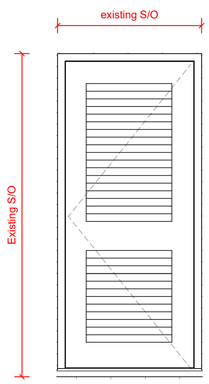

XD-04; Compressor door
- single action escape
- louvred door with insect mesh
- access control
- 50mm sill section
- ironmongery SET 3

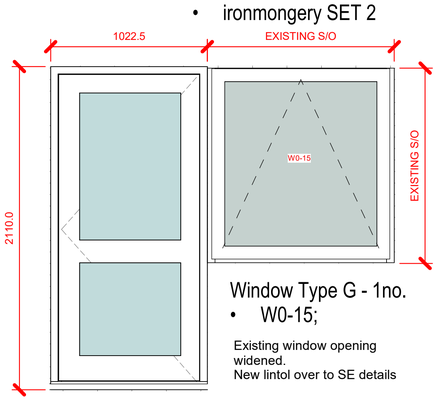

Window Type G - 1no.
- W0-15;

Existing window opening widened.
New lintol over to SE details

XD-05; B/A room door
- single action escape
- glazed
- access control
- 50mm sill section
- ironmongery SET 3

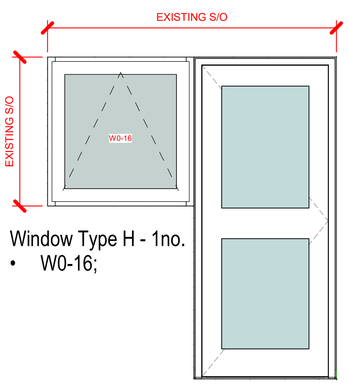

Window Type H - 1no.
- W0-16;

XD-06; Access door
- single action escape
- glazed
- access control
- 50mm sill section
- ironmongery SET 3

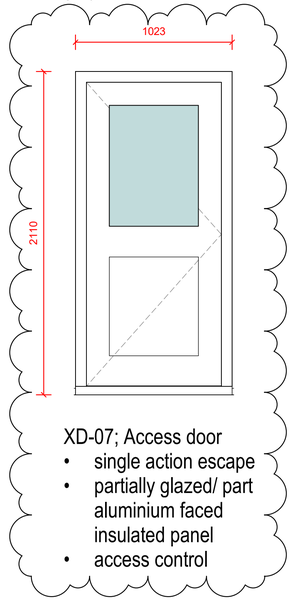

XD-07; Access door
- single action escape
- partially glazed/ part aluminium faced insulated panel
- access control

P2	appliace bay door configuration shown	25/04/28	SC/ LW	JE
C3	New appliance bay door XD-07 added	25/04/16	SC/ LW	JE
C2	Temporary door to appliance bay omitted, doors XD-05 and XD-06 now glazed, XD-01 no longer automated	05/11/24	SC/ MH	JE
C1	CONSTRUCTION	21/10/24	SC/ MH	JE
P1	TENDER ISSUE	06/05/24	SC/ MH	JE
Rev	Comment	Date	Chk	Apr

Project No:	Scale @ A1:	Drawn By:
502780	As indicated	JPE

Ingleton Wood

Property and Construction Consultants

Issuing office: Colchester
T: 01206 224270
www.ingletonwood.co.uk

Vision, form and function

Project:
St Neots Fire Station Extension
Huntingdon Street
St Neots
PE19 1DU

Client:
Cambs Fire and Rescue Service

Title:
Window and Door Schedule

Drawing Number:
STNFS-IWD-XX-XX-SH-A-2131

Status:	Purpose of Issue:	Revision:
S2	Information	P2