FRONT ELEVATION FASCIA - EXTERNALLY ILLUMINATED



Built up lettering and logo mounted direct to face of painted concrete background. Illuminated via trough lighting finished RAL 7043 traffic grey, satin finish.

SIDE ELEVATION FASCIA- NON ILLUMINATED



Built up lettering and logo mounted direct to face of painted concrete background.

SECTION THROUGH - FRONT ELEVATION
SCALE 1:5

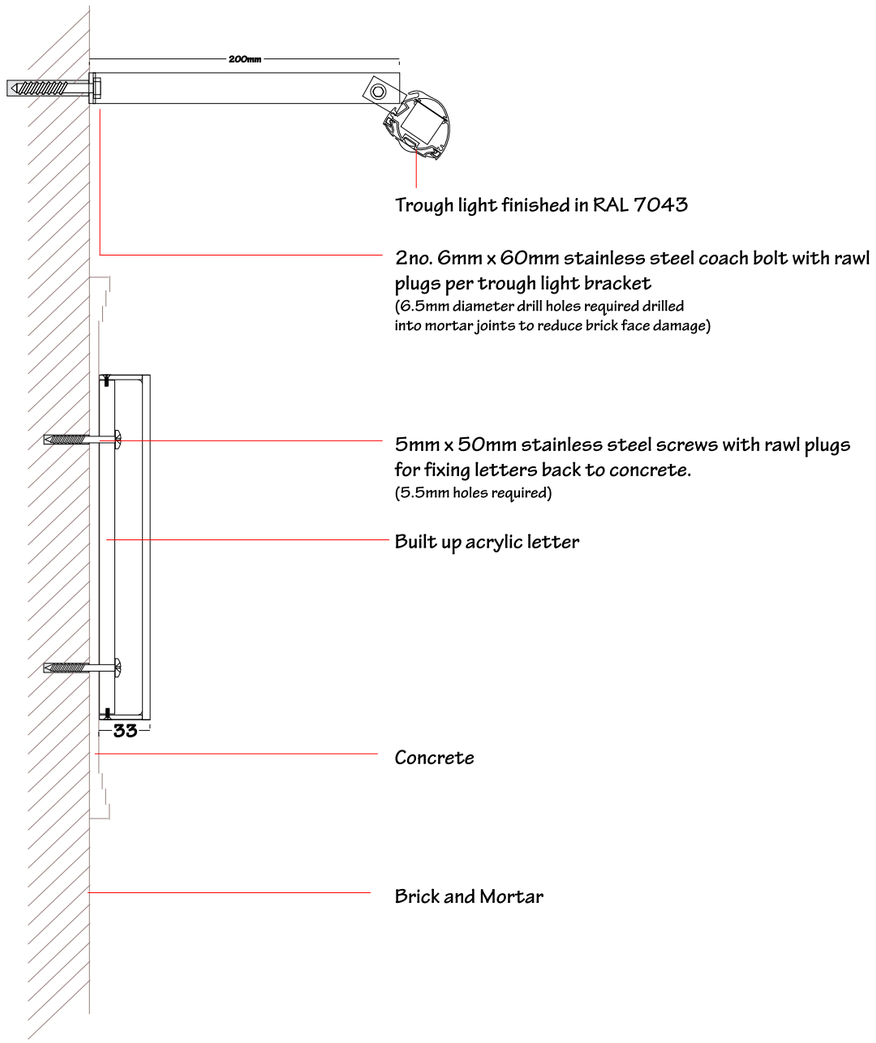

Trough light finished in RAL 7043

2no. 6mm x 60mm stainless steel coach bolt with rawl plugs per trough light bracket
(6.5mm diameter drill holes required drilled into mortar joints to reduce brick face damage)

5mm x 50mm stainless steel screws with rawl plugs for fixing letters back to concrete.
(5.5mm holes required)

Built up acrylic letter

Concrete

Brick and Mortar

SECTION THROUGH - SIDE ELEVATION
SCALE 1:5

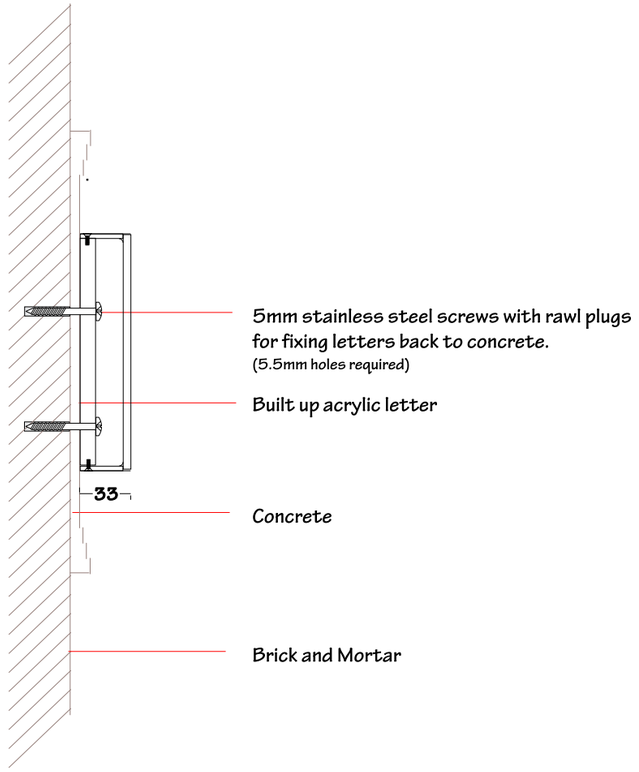

5mm stainless steel screws with rawl plugs for fixing letters back to concrete.
(5.5mm holes required)

Built up acrylic letter

Concrete

Brick and Mortar

envirosigns

www.envirosignsltd.co.uk

HUNTINGDON

11 Great Whyte,
Ramsey,
Huntingdon.
PE26 1HF

Drawing:
D-D01

Scale:
1:20@A3

All content copyright © 2010 envirosigns limited. The Drawing & Information contained may not be copied or used without prior consent from envirosigns ltd.

Do not manufacture to these sizes. Contractors must verify dimensions on site before commencing manufacture.