

PART SECTION AA THROUGH DOORS
SCALE 1 : 1

DOOR SCHEDULE

Door	Proposal
D1	Existing part glazed door removed and new wall constructed Architrave retained on corridor side
D2	Existing fire door to be retained
D3	Existing fire door to be retained
D4	Existing part glazed door to be replaced with new simple 6 panel fire door
D5	Existing glazed door and side panel replaced with new simple 6 panel fire door
D6	Existing solid fire door retained
D7	Existing part glazed fire door to be retained
D8	Existing solid fire door retained
D9	Existing door retained and rehung in new position
D10	New simple 4 panel door
D11	" " " "
D12	" " " "
D13	" " " "
D14	" " " "

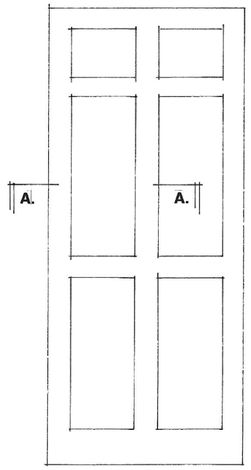

6 Panel Door.

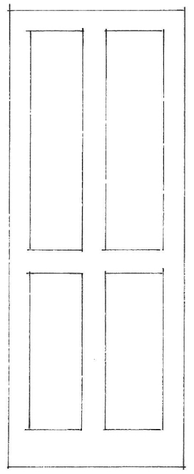

4 Panel Door.

ALL DOORS CONSTRUCTED IN SAPELE OR SUITABLE HARD WOOD

Project:	THE OLD BRIDGE HOTEL, 1 HIGH STREET, HUNTINGDON, PE29 3TQ		
Subject:	DOOR SCHEDULE AND DOOR DETAILS		
Scale:	1 : 20. Date: July, 25. Project Ref: BH.	Drwg. No.: 16	Rev.:
Architects:	**Big Brown Dog Limited**	The Old Post Office, Brookside, Dalham, Suffolk CB8 8TG	
	T: 01638 500234	F: 01638 500343	E: bigbrowndog@keme.co.uk
Original size: A2		© BIG BROWN DOG LIMITED	